


WEEKLY PROGRAMMABLE TIMER

- DIN RALL Installation
- Advanced pre-setting one week before
- Digital electronics general purpose time switch with daily and programs
- Repeat programs with 18 on/off settings, and setting on/off manually
- Lithium battery power reserve when electric supply cut off.
- Auto time error correction ± 30 sec, weekly

TECHNICAL DATA

- Voltage rating: AC220V
- Voltage LIMIT: AC/DC19~30V
- Hysteresis: ≤ 2 sec/day(25°C)
- ON/OFF operation: 18ON & 18OFF
- Power consumption: 7.5VA(max)
- Service life: mechanically 10^7
Electrically 10^5
- minimum interval: 1 minute
- weight: approx 150g
- Count down: 1sec - 99min 59 sec
- Pulse: 1 secretary - 59 min 59 sec
- Load capacity: resistive load: 10A250VAC
lagging load: 8A/250V
Lamp load: 2000W
- Switching contact: 1 changeover switch
- Power reserve: 3 years (lithium battery)
- Ambient temperature: -10 +40°C
- Ambient humidity: 35 ~85%RH

DIMENSIONS

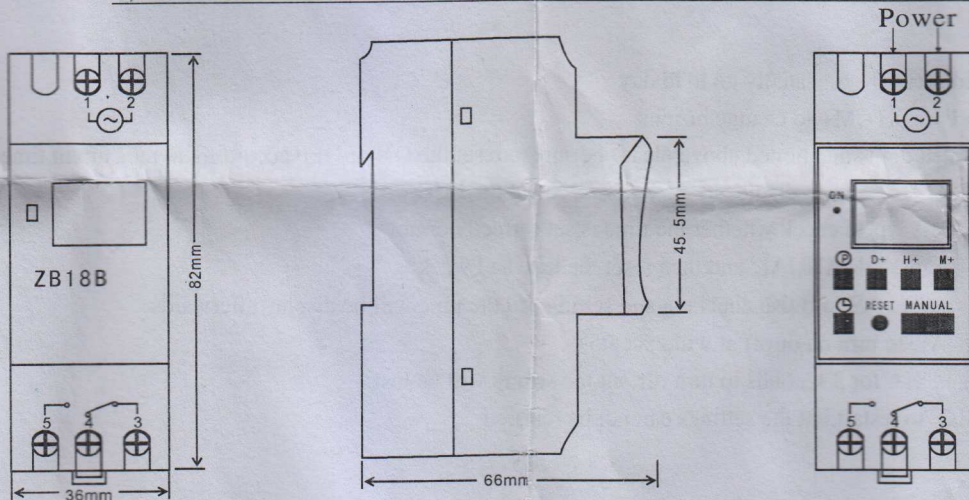

OPERATING INSTRUCTION

1. First time use this time switch, please press reset key.
2. At first time, the time switch is in 24h mode. If you want change to 12h mode please press on "Ⓞ" Key 5sec. And LCD will display AM if you want rechange to 24h mode, and press on "Ⓞ" key 5 sec to return.
3. Programming: set on & OFF same time, have 30 seconds to control bell

Step	Key	Programming
1	Press Ⓞ	Setting 1 ON time (display 1 on)
2	Press H+/M+	Set hours and minutes
3	Press D+	Select days of week. Same everyday, MO-FR, MO-SA, SA SU, MO-WE, TH-SA, MO WE FR, TU TH SA, different everyday. (If same everyday, not press this key)
4	Press Ⓞ	Setting 1 off time (display 1 off)
5	Press H+/M+	Set hours and minutes turn off time
6	Press D+	If you want same set in every day, you need not press this key
7	Repeat step 2-6	Set 2-18 on/off time
8	Press Ⓞ	End

* If need not 18 times setting press "Ⓞ" key to the end

WEEKLY PROGRAMMABLE TIMER

4. Count down: ("d" displays at bottom-left corner of LCD)

Step	Key	Programming
1	Press D & C	Into count down
2	Press C & $\text{H+}/\text{M+}$	Setting min/sec
3	Press MANUAL	Start count down
4	Press D	Return to start count down
5	Press D & C	Exit

5. Auto time error correction, weekly : ("7d" displays at bottom-left corner of LCD)

Step	Key	Programming
1	Press D & MANUAL	Into count
2	Press D+	Setting -30sec.-30sec
3	Press C	Confirm

6. Timing

6.1 Press C and press D+ repeatedly go to to day

6.2 Press C and press $\text{H+}/\text{M+}$ to change hr/min

7. Having operated items mentioned above, please be sure to reset the ON or OFF according to the current time.

Press "MANUAL" in order to display at the bottom Line of the LCD

8. Check time: press " D " to check whether the time is set correctly or not

press "MANUAL" and then reset the time and week

press " C " to finish checking and setting, and the time will be display afterwards

9. press "MANUAL" to turn on or off at will, except 5

10. press " D+ " and " H+ " for 3 seconds to turn off, but the setting will be lost

11. press "RESET" to restart, but the settings can not be restored

NOTE

- Time setting should according to the time sequence, couldn't be set crossly
- System with quit automatically if there's no operating within 8 seconds. And no data is saved.
It will quit when setting finishes
- Function 3, 4, can not be used simultaneously.