



25W Single Output AC Dimmable LED Power Supply

PCD-25 series



■ Features :

- AC phase-cut dimming
- Work with leading edge and trailing edge TRIAC dimmers
- 115VAC or 230VAC models available
- Built-in active PFC function
- Constant current design
- Protections: Short circuit / Over temperature
- Cooling by free air convection
- Fully isolated plastic case
- IP30 design
- Class II power unit, no FG
- Class 2 power unit
- Suitable for indoor LED lighting applications
- 100% full load burn-in test
- Low cost
- High reliability
- 3 years warranty



PCD-25-350 **A** A : With AC input 90~ 135VAC.
 B : With AC input 180 ~ 295VAC.


SPECIFICATION

| MODEL | PCD-25-350 □ | PCD-25-700 □ | PCD-25-1050 □ | PCD-25-1400 □ | |
|-----------------|--|---|---------------|---------------|----------|
| OUTPUT | RATED CURRENT | 350mA | 700mA | 1050mA | 1400mA |
| | OPERATING VOLTAGE RANGE | 40 ~ 58V | 24 ~ 36V | 16 ~ 24V | 12 ~ 18V |
| | CURRENT ACCURACY | ±5.0% | | | |
| | RATED POWER | 20.3W | 25.2W | 25.2W | 25.2W |
| | RIPPLE & NOISE (max.) Note.1 | 4.6Vp-p | 2.7Vp-p | 2.2Vp-p | 2Vp-p |
| | NO LOAD OUTPUT VOLTAGE (max.) | 63V | 50V | 35V | 25V |
| SETUP TIME | 1000ms / 230VAC 2000ms / 115VAC at full load | | | | |
| INPUT | FREQUENCY RANGE | 47 ~ 63Hz | | | |
| | POWER FACTOR (Typ.) | PF>0.9/115VAC, PF>0.9/230VAC, PF>0.9/277VAC at full load (Please refer to "Power Factor Characteristic" curve) | | | |
| | EFFICIENCY (Typ.) | 82% | 81% | 80.5% | 80% |
| | AC CURRENT (Typ.) | 0.6A/115VAC | 0.3A/230VAC | 0.2A/277VAC | |
| | INRUSH CURRENT(max.) | COLD START 10A(twidth=20μs measured at 50% I _{peak}) at 115VAC / 230VAC | | | |
| LEAKAGE CURRENT | <0.5mA 120VAC / 240VAC | | | | |
| PROTECTION | SHORT CIRCUIT | Hiccup mode, recovers automatically after fault condition is removed. | | | |
| | OVER TEMPERATURE | 95°C ±10°C (RTH1) Protection type : Shut down o/p voltage, re-power on to recover | | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +60°C (Refer to "Derating Curve") | | | |
| | WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes | | | |
| SAFETY & EMC | SAFETY STANDARDS | UL8750, CSA C22.2 No. 250.0-08(except for PCD-25-350, PCD-25-700), ENEC EN613471, EN61347-2-13, EN62384(for B type only), IP30 approved ; design refer to UL60950-1, TUV EN60950-1, EN61347-1, EN61347-2-13 | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3.75KVAC | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | | |
| | EMC EMISSION | Compliance to EN55015 (B type only), EN61000-3-2 Class C ; EN61000-3-3, FCC part 18 non-consumer equipment (A type only) | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024,EN61547, light industry level, criteria A | | | |
| OTHERS | MTBF | 906.5K hrs min. MIL-HDBK-217F (25°C) | | | |
| | DIMENSION | 84*57*29.5mm (L*W*H) | | | |
| | PACKING | 0.19Kg; 72pcs/14.7Kg/0.92CUFT | | | |
| NOTE | 1. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 2. Direct connecting to LEDs is suggested, but is not suitable for using additional drivers. | | | | |


Mechanical Specification

Case No.PCD16A Unit:mm


A Type:(PCD-25-A)

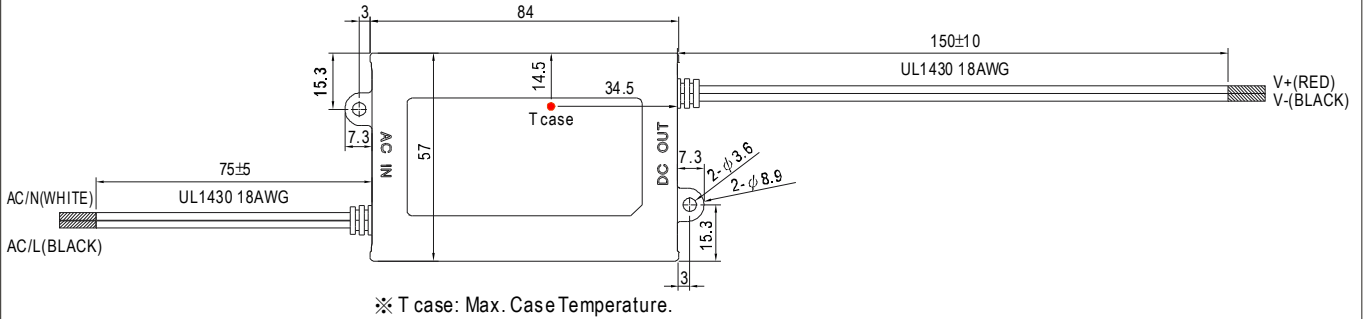


B Type:(PCD-25-B)

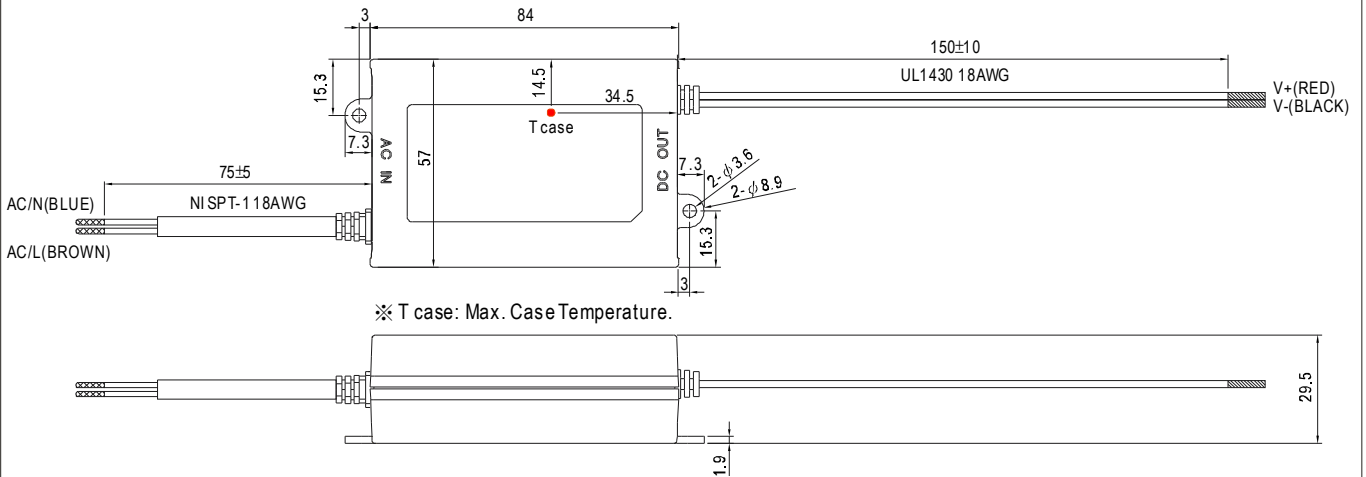


Block Diagram

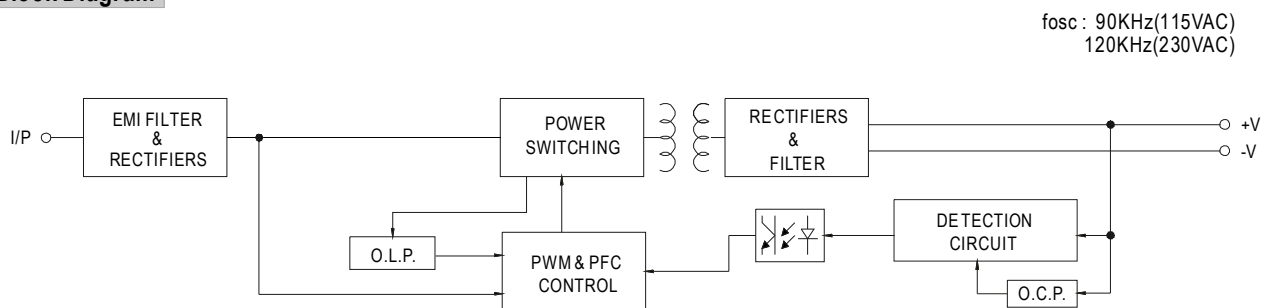

■ Derating Curve

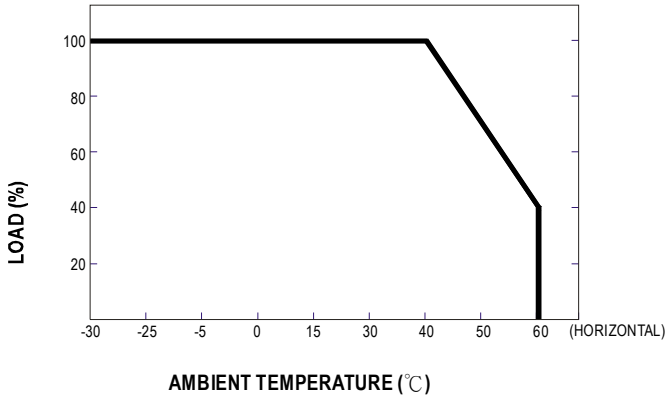


■ Static Characteristics

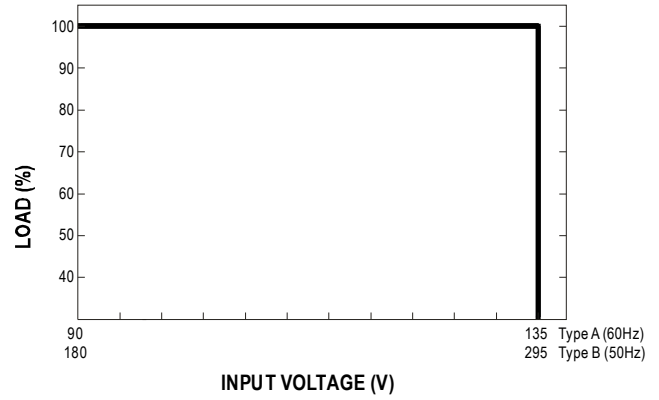


■ Power Factor Characteristic

Constant Current Mode

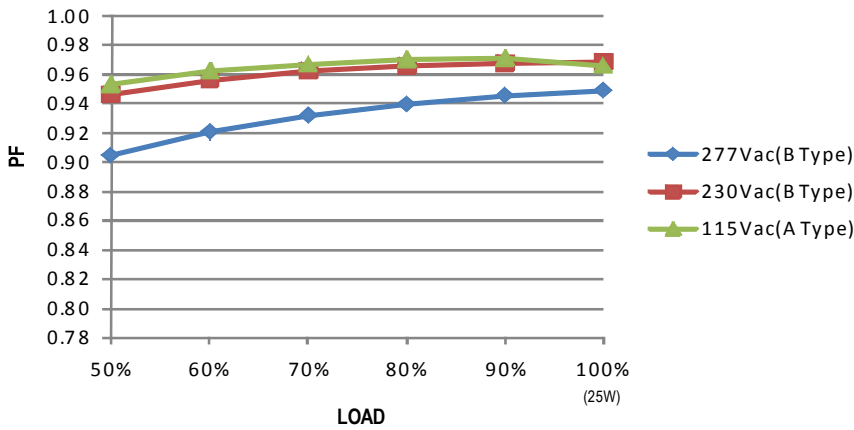


■ EFFICIENCY vs LOAD (PCD-25-350)

PCD-25 series possess superior working efficiency that up to 86% can be reached in field applications.

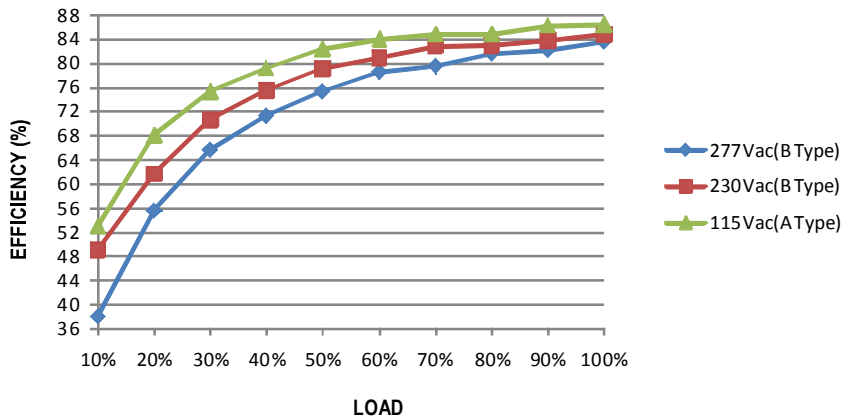

AC Dimming Operation

⊙ The following diagram depicts a typical installation utilizing the PCD-25 :

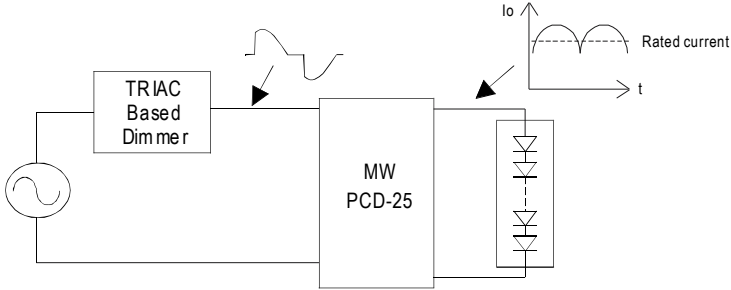

Under direct driving, the powersupply will work in "constant current mode (CC)" and output voltage of the power supply will be clamped by sum of forward voltage (V_f) of the LED strip.

⊙ Dimmer Compatibility Chart

| Manufacturer | Dimmer Model | |
|-------------------------|----------------------------|---------------------|
| LUTRON | SKY LARK SF- 12P-277 | (277VAC / 60Hz) |
| LUTRON | DVF-103P-277 | (277VAC / 60Hz) |
| LUTRON | SKY LARK SF- 10P | (120VAC / 60Hz) |
| LUTRON | SKY LARK S-600P | (120VAC / 60Hz) |
| LUTRON | SKY LARK DVF-103P | (120VAC / 60Hz) |
| LEVITON | ILLUMATECH™ Cat.No. IP 106 | (120VAC / 60Hz) |
| LEVITON | SURESLIDE™ Cat.No.6633-P | (120VAC / 60Hz) |
| LEVITON | SURESLIDE™ Cat. NO.6615-P | (120VAC / 60Hz) |
| JUNG | Licht-Management 225 TDE | (230VAC / 50Hz) |
| JUNG | Licht-Management 225 NV DE | (230VAC / 50Hz) |
| BERKER | Tronic-Drehdimmer 2867 10 | (230-240VAC / 50Hz) |
| Bodo Ehmann LICHTREGLER | T39.01 | (230VAC / 50Hz) |
| CLIPSAL | 32E450UDM | (220-240VAC / 50Hz) |
| CLIPSAL | NO 32E450TM | (220-240VAC / 50Hz) |

Conduction angle: 30 degrees(min.) / 180 degrees(max.)